


Separable Single Row Ball Bearings


Sizes 15 mm – 20 mm



B

Dimensions					Basic Load Rating		Limiting Speed for Lubricating by		Bearing Designation
d	D	B	r _s min	a	Dynamic C _r	Static C _{0r}	Grease	Oil	
mm					kN lbf		min ⁻¹		
15	35	8	0.3	0.15	4.06 909	4.55 1,020	20,000	24,000	E15
17	44	11	0.6	0.3	5.31 1,190	6.07 1,360	16,000	19,000	E17
	44	11	0.6	0.3	8.58 1,920	9.09 2,030	14,000	17,000	B017
20	47	12	1	0.6	8.58 1,920	9.09 2,030	14,000	17,000	E20

Bearing designations printed in bold face type are currently in our manufacturing schedule. Those shown in normal face type are made to order.

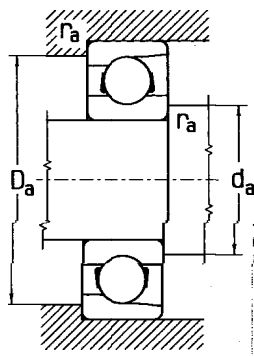

B

Abutment and Fillet Dimensions				Weight
d	d _a min	D _a max	r _a max	~
mm				kg lbs
15	17.2	31.8	0.3	0.034 0.074
17	22	39	0.6	0.079 0.174
	22	39	0.6	0.075 0.165
20	26	42	1	0.089 0.196