

FAG

★ 32026-X-XL

Tapered roller bearing


Schaeffler ID:
0836923800000

★ Preferred product

Tapered roller bearings 320, main dimensions to DIN ISO 355 / DIN 720, separable, adjusted or in pairs

X-life

Technical information

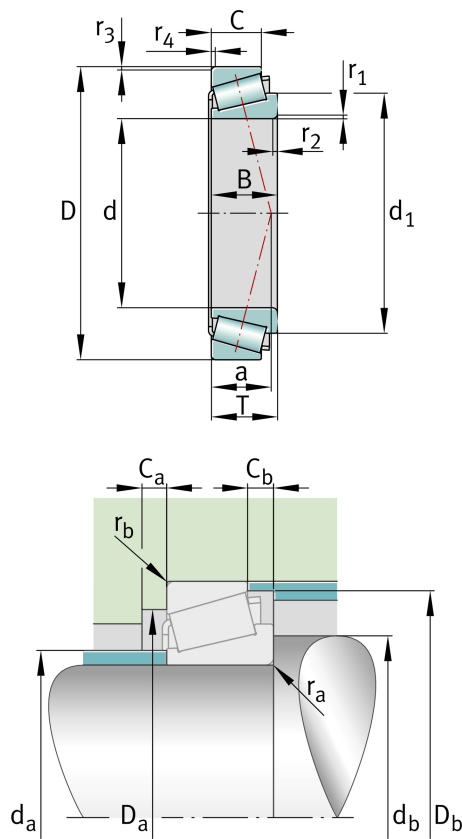

Main Dimensions & Performance Data

d	130 mm	Bore diameter
D	200 mm	Outside diameter
B	45 mm	Width, inner ring
C	34 mm	Width, outer ring
T	45 mm	Width, total
C _r	385,000 N	Basic dynamic load rating, radial
C _{0r}	550,000 N	Basic static load rating, radial
C _{ur}	81,000 N	Fatigue load limit, radial
n _G	3,650 1/min	Limiting speed
n _{gr}	2,320 1/min	Thermal speed rating
	5.05 kg	Weight

Dimensions

r _{1, 2 min}	2.5 mm	Minimum chamfer dimension of inner ring back face
r _{3, 4 min}	2 mm	Minimum chamfer dimension of outer ring back face
a	44 mm	Distance between the apexes of the pressure cones
d ₁	165.9 mm	Guidance rib diameter of inner ring

Mounting dimensions

d _{a max}	144 mm	Maximum diameter of shaft shoulder
d _{b min}	140 mm	Minimum diameter of shaft shoulder
D _{a min}	178 mm	Minimum diameter of housing shoulder
D _{a max}	190 mm	Maximum diameter of housing shoulder
D _{b min}	192 mm	Minimum diameter of housing shoulder
C _{a min}	8 mm	Minimum axial space
C _{b min}	11 mm	Minimum axial space
r _{a max}	2.5 mm	Maximum fillet radius of shaft
r _{b max}	2 mm	Maximum fillet radius of housing

Calculation factors

e	0.43	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
Y	1.38	Dynamic axial load factor
Y ₀	0.76	Static axial load factor

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.

Additional information

T4EC130	Comparative designation to ISO 10317 and ISO 355
---------	---