


Technical data

NUTR206/3AS

Roller follower with inner ring

Needle roller bearing, roller follower, full-complement cylindrical roller, with inner ring, double-side shields, spherical outer ring

VISUAL (S)

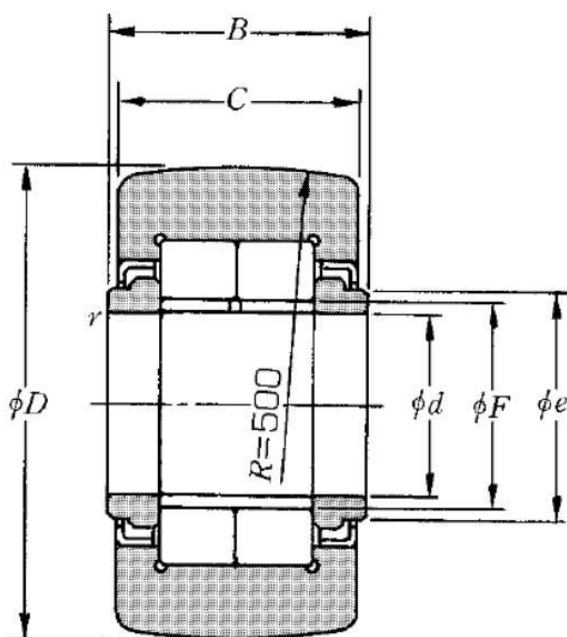

PRODUCT DIMENSIONS

d - Internal diameter	30 mm
D - External diameter	62 mm
C - Width of bearing, drawn cup or outer ring	28 mm
F - Under roller diameter	35 mm
B - Bearing/Inner ring width	29 mm
e - Inlet diameter of roller or washer	38 mm
R - Track roller radius	500 mm
rs - Min fillet radius	0.3 mm

PRODUCT DIMENSIONS

Bearing with/without cage	Without
Radial clearance class	CN
Precision class	P0
Mass	0.466 kg
Brand	NTN

PRODUCT PERFORMANCE

Cr - Dynamic load rating	56.5 kN
C0r - Static load rating	72.5 kN
Track load capacity spherical outer ring	6.95 kN
Nlim - Grease lubrication limit speed	2900 tr/min
Tmin - Min operating temperature	-20 °C
Tmax - Max operating temperature	120 °C