



The Timken Company

4500 Mt Pleasant St. NW


N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • Web site: www.timken.com

Part Number X30206CM - Y30206CM, Tapered Roller Bearings - TS (Tapered Single) Metric

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

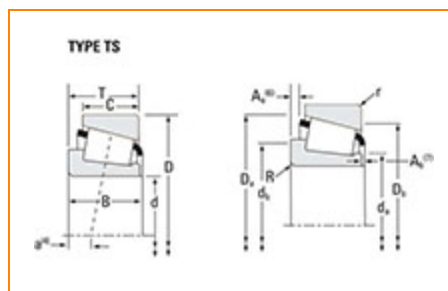

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

Series	30206C
Cone Part Number	X30206CM
Cup Part Number	Y30206CM
Design Unit	Metric
Bearing Weight	0.2 Kg 0.5 lb
Cage Material	Stamped Steel

Dimensions



Bore

30 mm
1.1811 in

D - Cup Outer Diameter	62.0 mm 2.4409 in
B - Cone Width	16 mm 0.6299 in
C - Cup Width	14 mm 0.5512 in
T - Bearing Width	17.25 mm 0.6693 in

Abutment and Fillet Dimensions

R - Cone Backface "To Clear" Radius¹	1.020 mm 0.04 in
r - Cup Backface "To Clear" Radius²	1.02 mm 0.04 in
da - Cone Frontface Backing Diameter	36.5 mm 1.44 in
db - Cone Backface Backing Diameter	38 mm 1.5 in
Da - Cup Frontface Backing Diameter	58.42 mm 2.30 in
Db - Cup Backface Backing Diameter	55.12 mm 2.17 in
Ab - Cage-Cone Frontface Clearance	2.8 mm 0.11 in
Aa - Cage-Cone Backface Clearance	0 mm 0 in
a - Effective Center Location³	-3.6 mm -0.14 in

Basic Load Ratings

C90 - Dynamic Radial Rating (90 million revolutions)⁴	12800 N 2880 lbf
C1 - Dynamic Radial Rating (1 million revolutions)⁵	49300 N 11100 lbf
C0 - Static Radial Rating	51800 N 11600 lbf
C_{a90} - Dynamic Thrust Rating (90 million revolutions)⁶	8210 N 1850 lbf

Factors

K - Factor⁷	1.56
e - ISO Factor⁸	0.37
Y - ISO Factor⁹	1.6
G1 - Heat Generation Factor (Roller-Raceway)	13.4
G2 - Heat Generation Factor (Rib-Roller End)	10.7
Cg - Geometry Factor¹⁰	0.0601

¹ These maximum fillet radii will be cleared by the bearing corners.

² These maximum fillet radii will be cleared by the bearing corners.

³ Negative value indicates effective center inside cone backface.

⁴ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.

⁵ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.


⁶ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

⁷ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁸ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁹ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

¹⁰ Geometry constant for Lubrication Life Adjustment Factor a_{3l}.

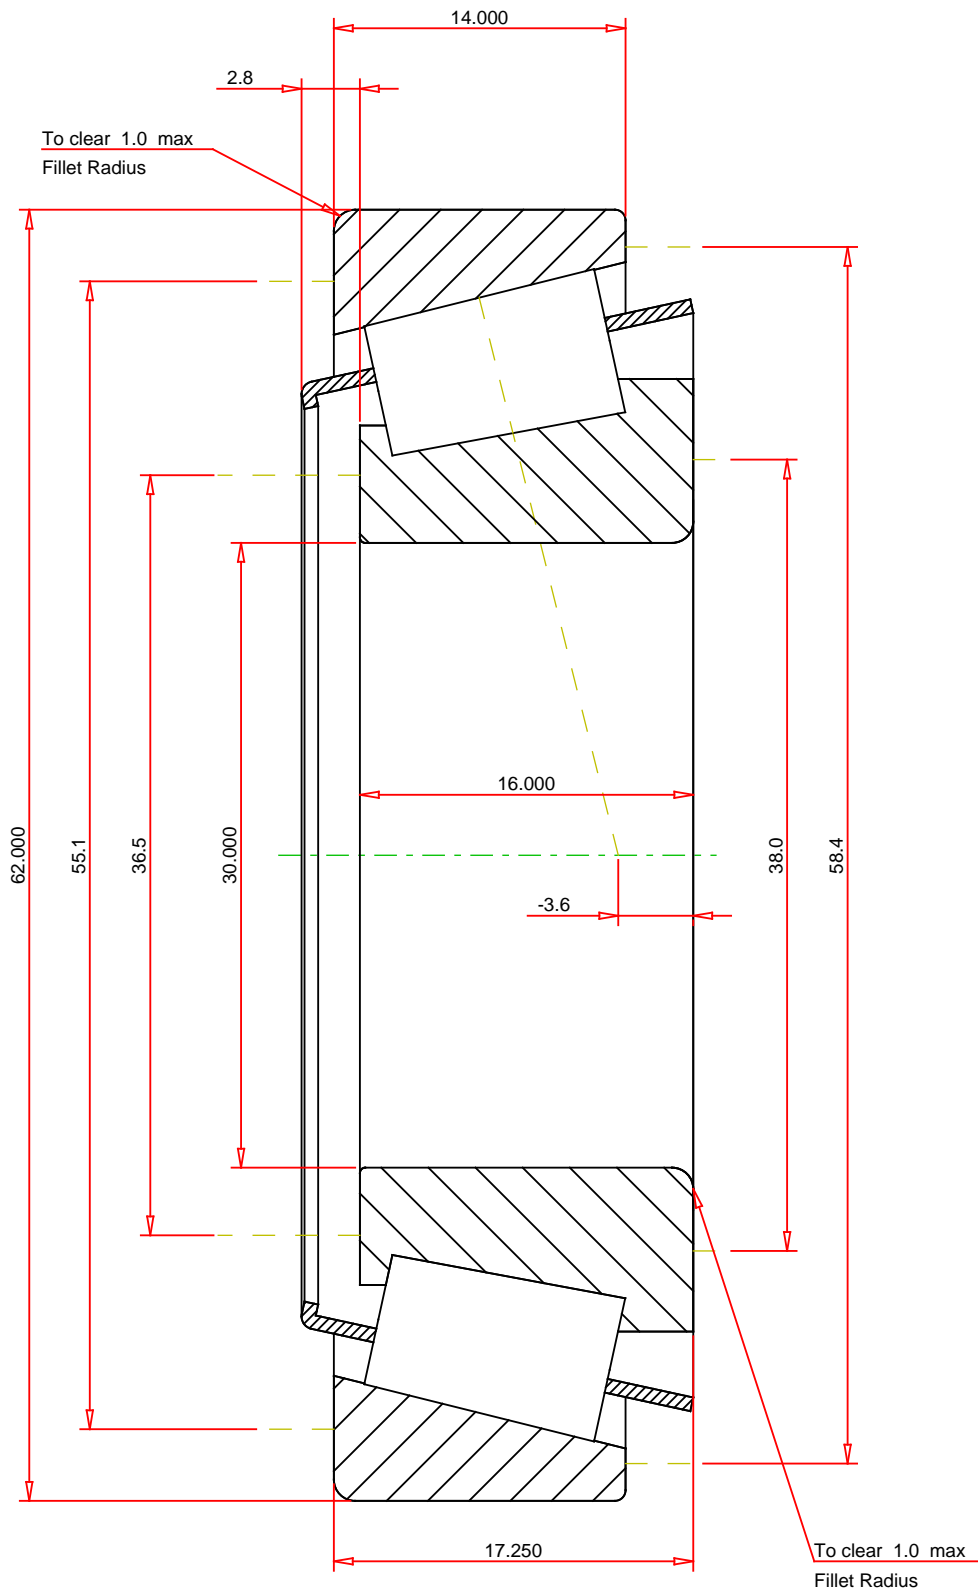

METRIC UNITS

ISO Factor - e	0.37
ISO Factor - Y	1.6
Bearing Weight	0.2 kg
Number of Rollers Per Row	17
Effective Center Location	-3.6 mm

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

X30206CM - Y30206CM
Tapered Roller Bearings - TS (Tapered Single)
Metric

K Factor	1.56	
Dynamic Radial Rating - C90	12800	N
Dynamic Thrust Rating - Ca90	8210	N
Static Radial Rating - C0	51800	N
Dynamic Radial Rating - C1	49300	N

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY